



IKUSI

# Amplifier 17 inputs (16 sat+1 terr)

A solution for compensating through losses of multiswitches, taps, splitters



Line amplifiers for 16 satellite polarizations  
and 1 terrestrial signal



Cascade mounting with  
MSC Multiswitches




Sloped output

**MSA amplifiers**

- Adjustable slope response for satellite frequencies.
- All models with power supply included, MSA-005 except.
- European product.
- Indoor mounting and wall fixing.

MODEL	MSA-005	MSA-009	MSA-013	MSA-017
REF.	3780	3781	3782	3783
Number of inputs	5 (4 SAT inputs+1 TERR input)	9 (8 SAT inputs+1 TERR input)	13 (12 SAT inputs+1 TERR input)	17 (16 SAT inputs+1 TERR input)
Number of outputs	5	9	13	17
Frequency range SAT	MHz	950 - 2150	950 - 2150	950 - 2150
Frequency range TERR	MHz	40 - 862	40 - 862	40 - 862
Gain SAT	dB	10 - 15	25	25
Gain TERR	dB	10 - 15	22	22
Isolation between trunk lines	dB	25	25	25
Maximum input level SAT	dBµV	103 - 98	90	90
Maximum input level TERR	dBµV	99 - 94	85	85
Maximum output level SAT	dBµV	113	115	115
Maximum output level TERR	dBµV	109	107	107
Current consumption	mA	350	700	1100
DC supply voltage	VDC	9 - 20	12	12
Operating temperature	°C	-30 ... +70	-25 ... +50	-25 ... +50
Dimensions (w x d x h)	cm	12.7 x 10.4 x 4.1	18.6 x 14.6 x 5.5	18.6 x 14.6 x 5.5

#### Application example

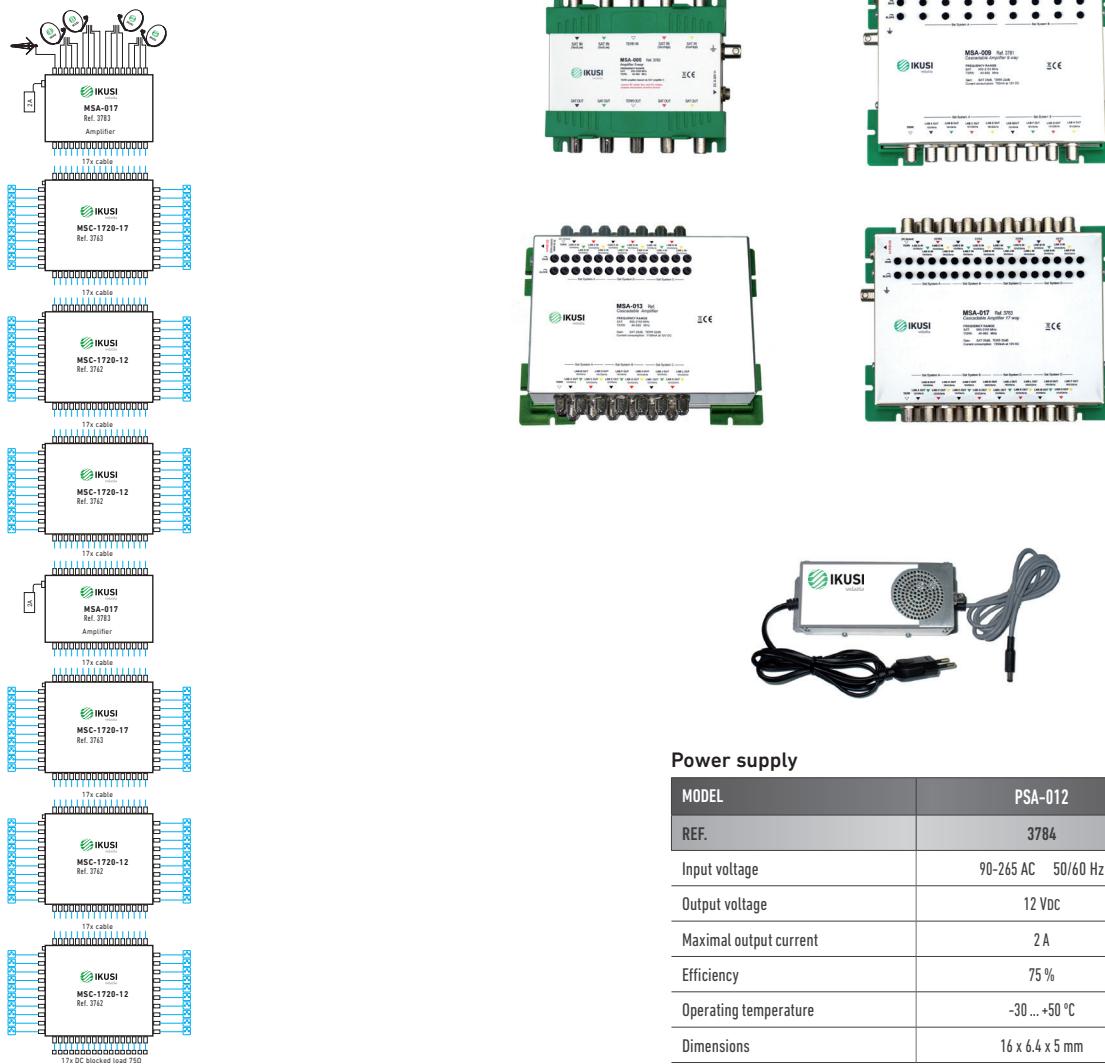

#### Power supply

MODEL	PSA-012
REF.	3784
Input voltage	90-265 AC 50/60 Hz
Output voltage	12 VDC
Maximal output current	2 A
Efficiency	75 %
Operating temperature	-30 ... +50 °C
Dimensions	16 x 6.4 x 5 mm