



IKUSI
velatia

smartexperience

Satellite and Digital TV optical fibre receiver




FRD-100

Sat/Terr optical fibre receiver

MODEL		FRD-100
REF.		4895
Frequency range	MHz	45 - 2600
Optical wavelength	nm	1290 - 1600
Output level	dB μ V	Input level 0 dbm = 94 Input level -3 dbm = 88 Input level -6 dbm = 82 Input level -9 dbm = 76
CNR (DVB-T signals) for output level	dB	46
Coaxial connector		F
Optical connectors		SC/APC
Optical window	dBm	-13 ... +1
Consumption (12V)	W	3.5
Power supply	VDC	18
Dimensions	mm	118 x 210 x 40

Application in the fibre optic distribution of DTT and satellite TV signals in single family residential developments.

Installation example

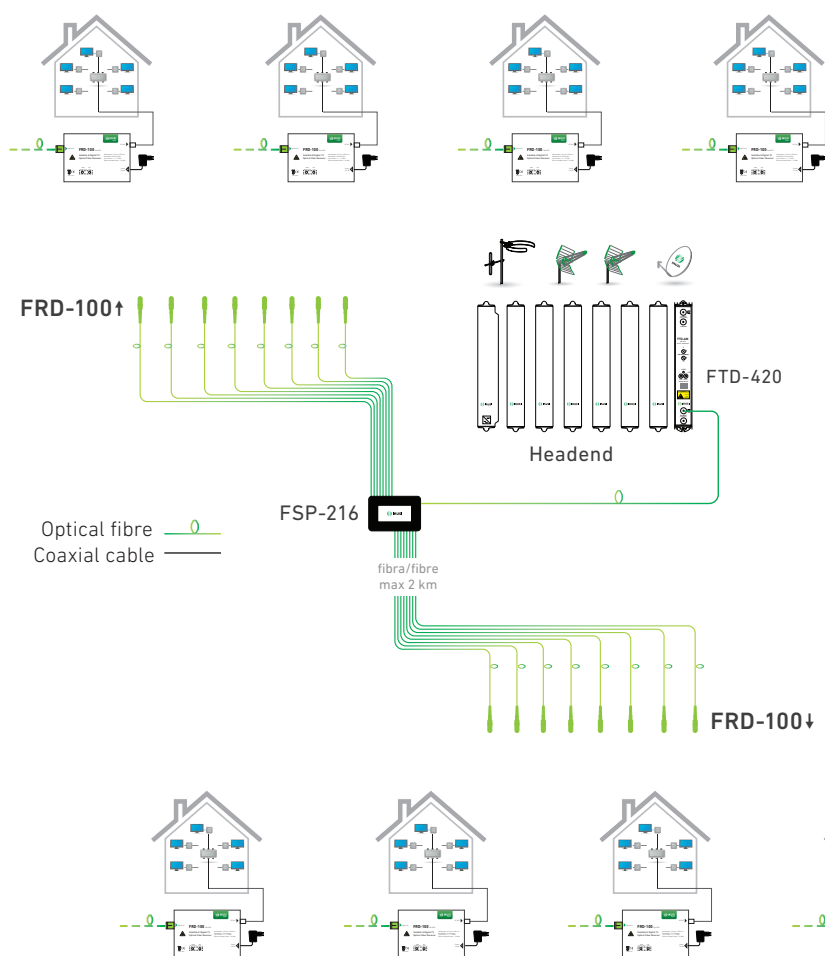

FRD-100



Pº Miramón, 170
20014 San Sebastián - SPAIN
Tel.: +34 943 44 88 00 - Fax: +34 943 44 88 20
television@ikusi.com - www.ikusi.tv