


Fiber tray 1U 19" telescopic guide, front for 24 SC/LC-Dx 2x12 fusion trays



vista posterior

Interchangeable front panel 24 duplex adapters

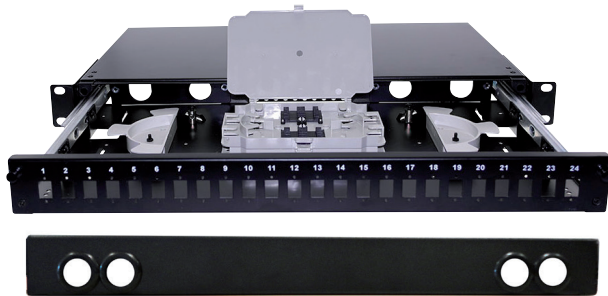

MODEL	PFO-124	
REF.	8297	
Manufacturing material	Rolled steel with electrostatic treatment	
Cover	Telescopic front panel	
Locking system	2 clamping pins	
Rear ports (cable entry)	20 x 4 mm Ø	
	Output ports (Front included)	
Total splice capacity	Front panel 24 SC Simplex / 24 LC Duplex	
Fibre routing guide	24 and 48 (mounting fusion)	
Bending radius	Integrated in fusing tray	
Radio curvatura	40 mm	
Dimensions (mm)	Width	475 mm
	Height	45mm - 1U RACK
	Depth	245 mm
Colour	Black (RAL9005)	
Heat-shrinkable splice protector	24 pcs (60mm)	
Cable clamp	6 nylon cable ties	
RACK fixing	4 plastic screws and washers M6 x 6mm	
Accessories L for RACK	2	
Packing dimensions	500 x 360 x 60 mm	
Total weight	3 Kg	

MODEL	FFO-024
REF.	8296
Type	Front panel for 24 duplex adapters, interchangeable in tray PFO-124
Adapter duplex	ADF-104 (8291)

- 1U rack tray for fibre distribution in 19" rack.
- It has 4 inputs on the rear side to insert the fibre hoses.
- The front is interchangeable with other models such as FFO-024 SC duplex, FC or ST.
- The tray is built with a double telescopic guide, which allows it to be extracted in its entirety and thus facilitates the work of spinning, fusing and connecting the fibres.
- The rack fastening parts are extensible to move the tray forward or backward in the rack cabinet.

Simplex and duplex SC/APC adapters



ADF-102



ADF-103



ADF-104