

Optical outlet with SC/APC adapter




ARTU-F01


Specifications

MODEL		ARTU-F01	
REF.		2582	
Connector type		SC/APC-SC/APC SM	
Format		Simplex With fixing screws (not included)	
Material	Cover	Polycarbonate	
	Flange	Stainless steel - SUS304	
	Casing	Polycarbonate	
	Core	Polyethylene terephthalate - PET+GF	
	Sleeve	Ceramic - Zirconia ZrO2	
Tensile strength	N	2.0 ... 5.9	
Accepted fibre type	SM	9/125	
	MM	OM3 - 50/125	
Insertion losses	dB	≤ 0.25	
Wavelength	nm	1310 ~ 1550 ~ 850	
Durability	Cycles	> 500 times	
	Losses	dB	< 0.2
Dimensions	mm	85 x 85 x 25	

- ARTU-F01 wall mount optical outlet with one SC/APC simplex zirconia green port/adaptor.
- The fibre optic adapter incorporates a cover with a hinged dust cover. The fixing screws are not necessary as it has metal flange for fastening to the base.
- Designed to facilitate the positioning of the connector and fibre optic cable inside the universal flush-mount box (box not included).



- The ARTU-F01 base includes wall fixing screws.
- ABS coverplate is press-fitted on.
- Its elegant snow white appearance makes it perfect for indoor use.

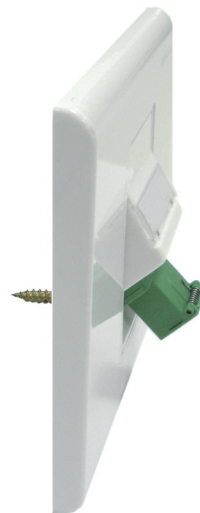

universal box
(not included)